

Technical Data Sheet - HIDE new


Product Photo



1. Product Identification

Model	HIDE new
Installation	Built-in
Product line	/

2. Dimensions and structure

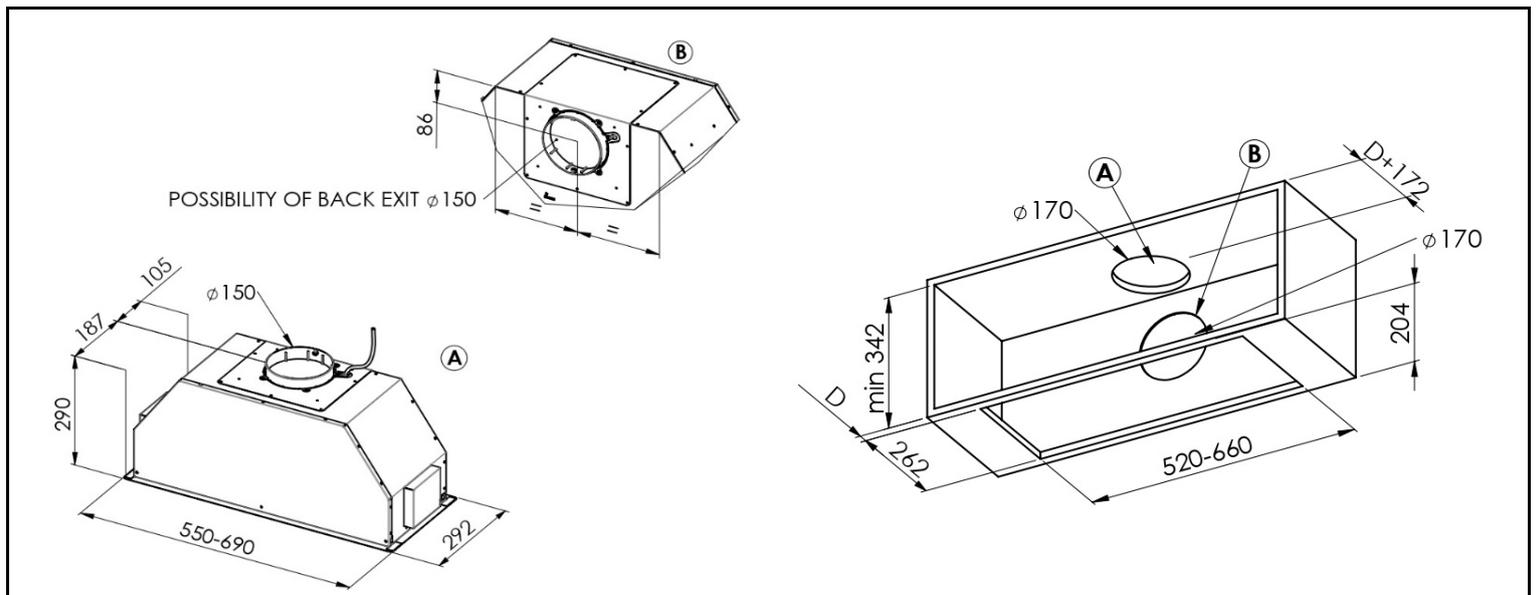

Module	60 - 80 (cm)
Length	55 (cm) - 69 (cm)
Height	29,0 (cm)
Depth	29,2 (cm)
Finish	inox

3. Suction performance

Air flow (Min/Max/Booster)	226 / 494 / 754 (m ³ /h)
Speed	3 + B
Controls	Backlit Soft Touch electronic controls 3S+B
Static Pressure	590 (Pa)
Version	Duct out

4. Lighting

Type	LED bar
Number	1
Power	4W x 60 cm, 6W x 80 cm
Dimmable	Adjustable from 0 to 152 Lux
Temperature	Adjustable from 2700K to 6000K

5. Noise

Min/Max/Booster	47 / 64 / 71 dB(A)
-----------------	--------------------

6. Electrical data

Voltage	220-240V / 50Hz - 220V / 60Hz
Maximum power consumption	279W x 60cm – 281W x 80cm

7. Filtration and odors

Grease filters	Dishwasher-safe aluminum filters. Cod. R258112 (2pcs x 60) R258111 (2pcs x 80)
Odor filters	Activated carbon (optional)

8. Installation

Minimum height from gas hob	60 (cm)
Motor outlet diameter	150 (mm)

9. Certifications

Energy Class	A
--------------	---

10. Weight and Transport

Net Weight	60cm Kg 9,50 - 80cm Kg 10,45
Gross Weight	60cm Kg 11,00 - 80cm Kg 12,44
Packaging Dimensions WxDxH	(60) 630x370x390mm (80) 930x370x390mm
Pieces per pallet / pallet size	(60) 20pz / 80x120cm (80) 15pz / 100x120cm

11. Accessories

Set of 2 carbon odor filters Ø170	Cod. 0051H01000
Non-return valve Ø150	Cod. 0051H02000
Remote control with holder	Cod. 00BTE05BF500

12. Product Plus

Light indicator for anti grease filters maintenance
Carbon filter replacement alert
Adjustable and delayed self-switching off
Perimeter extraction
Easy cleaning: the bottom panel can be easily removed without the use of tools.
Rear outlet, possibility to rotate the motor to vent air directly through the rear wall
Reducer 150–125 mm

Date: 08/10/2025

Revision:

